


Annular excess air burner for gas BIC..R with annular excess air burner housing RSG

Technical Information · GB
7.2.30 Edition 03.11

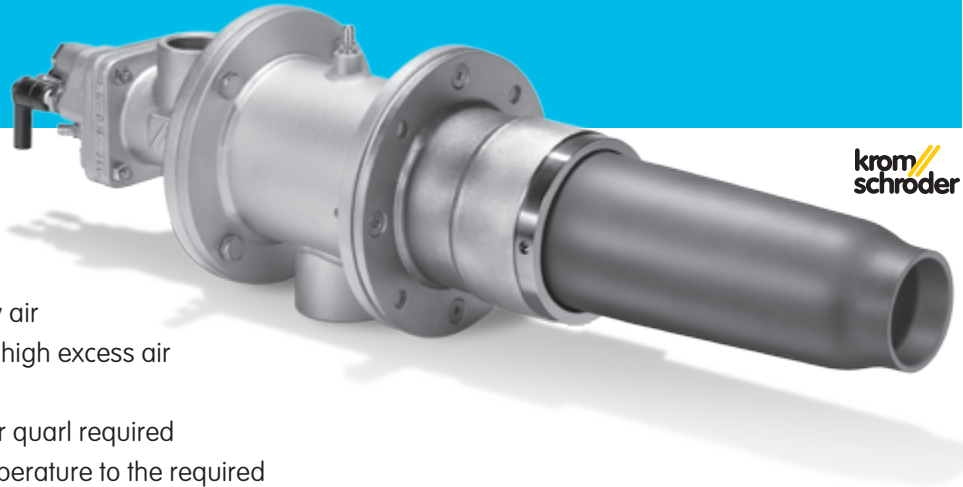

krom
schroder

- Output range: 15 – 360 kW
- Separate connection for secondary air
- Low pollutant emissions even with high excess air
- Suitable for high kiln temperatures
- Lightweight construction, no burner quartz required
- Adjustment of the flame outlet temperature to the required kiln temperature
- High outlet velocity possible even with low energy supply and kiln temperature
- Modulating control and impulse control possible
- Reliable electrical ignition and safe flame control thanks to ionisation control
- Flame temperature 50 – 1500°C
- Variable λ range



elster
Kromschroder

Contents

Annular excess air burner for gas BIC..R with annular excess air burner housing RSG	1
Contents	2
1 Application	3
1.1 Examples of application	5
1.1.1 Modulating or stage-controlled burner system for high-speed kilns	5
1.1.2 Burner system with lance	5
2 Mechanical construction	6
2.1 BIC..R with a steel extension	6
2.1.1 Burner insert	6
2.1.2 Burner housing (kiln flange)	7
2.1.3 Steel extension for BIC..R	7
2.2 Ceramic tube set TSC for BIC and RSG	7
2.3 Annular excess air burner housing RSG with a steel extension	7
3 Function	8
4 Selection	9
4.1 Burner type	9
4.2 Burner size	9
4.3 Burner head	9
4.4 Combination TSC for BIC and second TSC for RSG	10
4.5 SiC material for TSC	10
4.6 Calculating the length of BIC..R	11
4.7 Type code	12
4.7.1 Annular excess air burner BIC..R	12
4.7.2 Ceramic tube set TSC	12
4.7.3 Annular excess air burner housing RSG	12
5 Project planning information	13
5.1 Installation	13
5.2 Recommended ignition transformer	14
5.3 Nozzle-mixing burners	14
5.4 Flame control	14

5.5 Hot air compensation	14
5.6 Purging air/cooling air	15
5.7 Emissions	15
5.8 Flame temperature	16
5.9 Gas line connection	16
5.10 Air line connection	16
6 Technical data	17
6.1 Dimensions	18
6.1.1 BIC..R with annular excess air burner housing RSG	18
6.1.2 BIC..L..R with annular excess air burner housing RSG and steel extension for RSG	19
6.1.3 BICA with annular excess air burner housing RSG and steel extension for RSG	20
7 Maintenance cycles	21
Feedback	22
Contact	22

1 Application

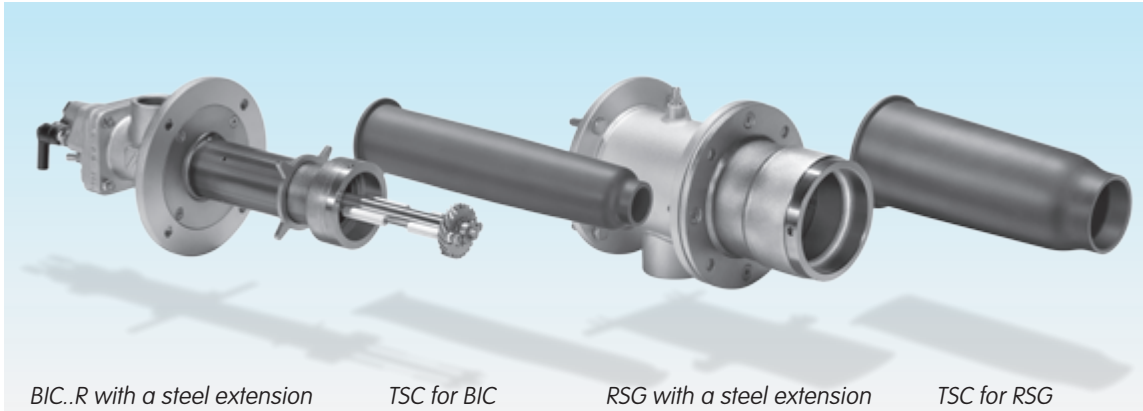

Thanks to the annular excess air burner BIC..R's modular design, the components can be selected in accordance with the required gas type and burner output.

The annular excess air burner is suitable for use in industrial kilns in the ceramics, pottery and enamel industries. Its mechanical construction means that it is particularly suitable for use on high-speed kilns.

Two air connections allow a very high lambda value of up to $\lambda = 50$ to be reached. The flame outlet temperature can be adjusted directly to the kiln temperature/time profile in intermittent systems with minimum energy supply while also supplying a high flame outlet velocity and therefore high convective heat transfer.

Separate secondary air ensures CO-optimised combustion with high excess air.

The large air cross-sections enable large volumes of air to be introduced during the system's cooling phase, which leads to a reduction in the cooling time and therefore to an increase in the system's availability.

Reducing and oxidising combustion are possible.



Ceramics kiln with temperature control via impulse system



High-speed combustion in the fine ceramics industry



Chamber kiln for intermittent operation



Intermittent shuttle kiln in the fine ceramics industry



Intermittent shuttle kiln



Intermittent shuttle kiln

1.1 Examples of application


1.1.1 Modulating or stage-controlled burner system for high-speed kilns

The burner output is modulated or stage-controlled by adjusting the butterfly valve BVA. The air/gas ratio control VAG ensures a constant gas/air flow ratio via the impulse line.

The secondary air flow is varied by adjusting the second butterfly valve, independent of the burner output. This means that the flame temperature can be matched to the kiln temperature while maintaining a high flame outlet velocity.


Short cooling times are achieved by feeding the maximum cooling air volume when the burner is switched off and the butterfly valves are fully open.

This example system can be used in the manufacture of heavy clay and fine ceramics, porcelain, technical ceramics and ceramic refractory products.

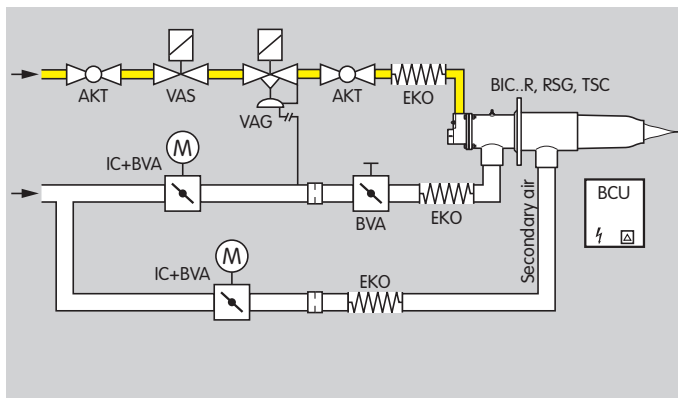


1.1.2 Burner system with lance

The burner may also optionally be ignited by an integrated ignition lance.

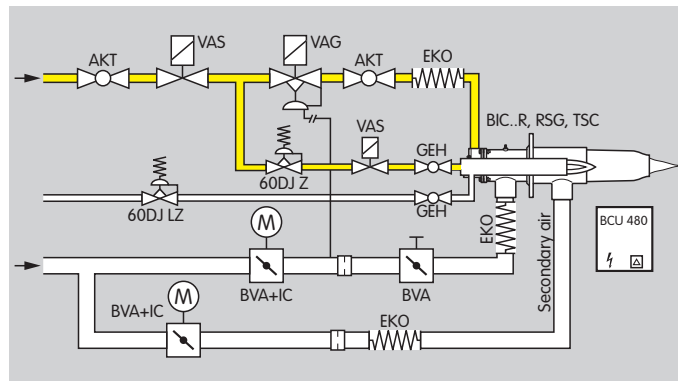


2 Mechanical construction

The annular excess air burner consists of the modules BIC..R with a steel extension, ceramic tube set TSC and the annular excess air burner housing RSG (also with a steel extension if applicable) with a further ceramic tube set TSC. The modular design allows the annular excess air burner to be easily adapted to the respective process or to be integrated into existing systems. Maintenance and repair times are reduced and existing kiln installations can easily be converted.

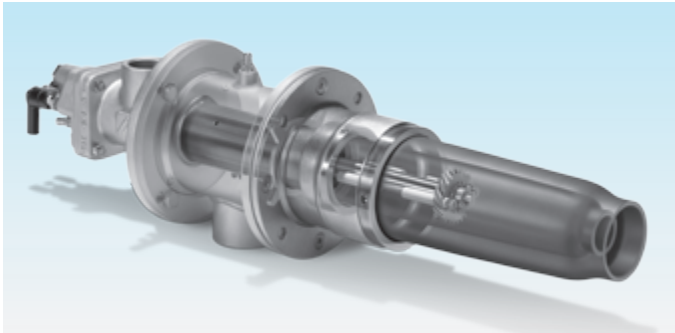


2.1 BIC..R with a steel extension

The burner unit BIC..R is composed of the following modules: burner housing, burner insert and steel extension.

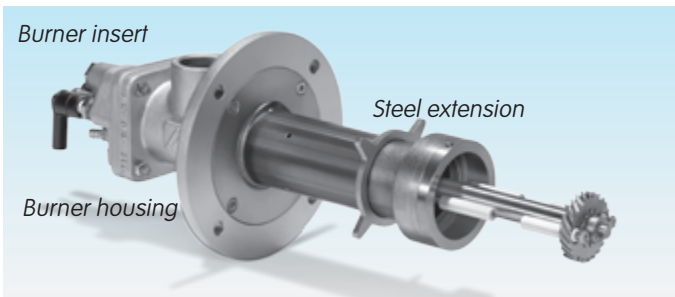

2.1.1 Burner insert

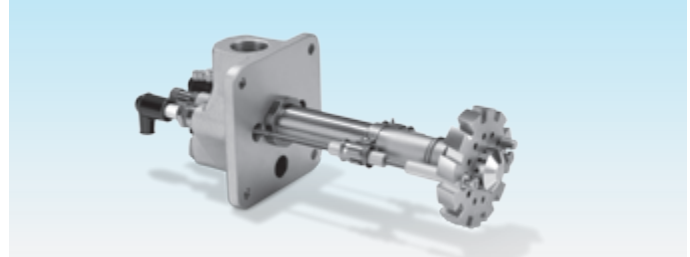


The combustion gas is supplied to the burner head via the gas connection and the gas nozzle. The gas connection flange comprises of the sight glass, ground screw and electrode plugs with plug caps.

As from construction stage E, a measuring orifice and flow adjustment are integrated in the connection flange to easily measure and adjust the gas flow rate.

The ignition and ionisation electrodes are screwed into the connection flange and can be replaced without removing the burner insert.


Burners BIC and BICA are nozzle-mixing burners. Gas and air are mixed only once they are in the burner head. This prevents explosive gases from being generated in the pipeline. There are various burner head versions for different flame shapes and gas types.

2.1.2 Burner housing (kiln flange)

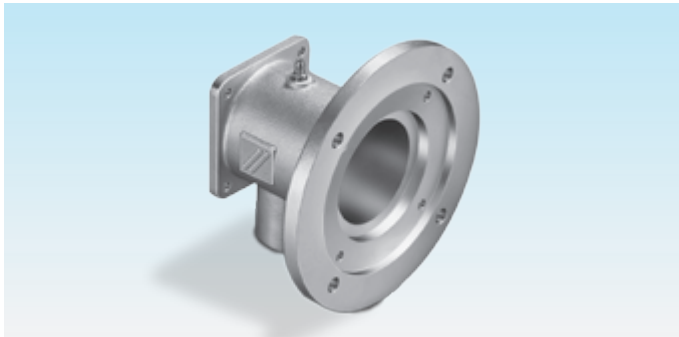


The burner BIC is secured to the annular excess air burner housing RSG by the burner housing. The burner housing accommodates the burner insert and the ceramic tube TSC, and routes the combustion air. The combustion air pressure can be measured using an air pressure test nipple.

2.1.3 Steel extension for BIC..R

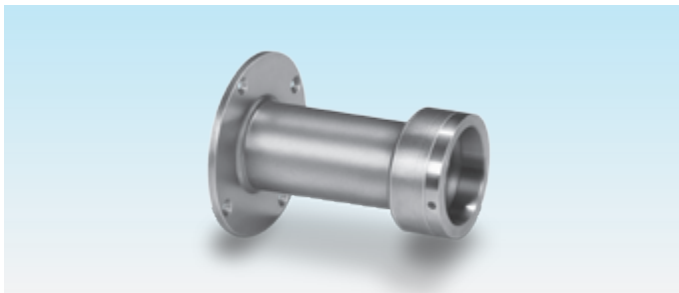

The burner is adapted to the length of the annular excess air burner housing RSG via the steel extension for BIC..R.

2.2 Ceramic tube set TSC for BIC and RSG

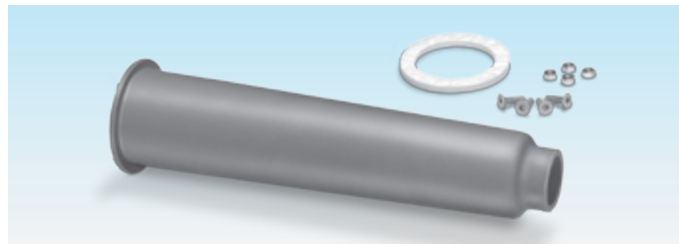

A SiC ceramic tube TSC in lightweight design serves as combustion chamber. The SiC tube ensures complete combustion so that no burner quarl is required.



2.3 Annular excess air burner housing RSG with a steel extension



The burner BIC..R and the annular excess air burner housing RSG are fitted as a unit to the kiln wall. Secondary air is supplied to the burner via the RSG independently of the primary burner operation. The annular excess air burner housing RSG accommodates the second ceramic tube set TSC.

The burner may be adapted to different kiln wall thicknesses via the steel extension for RSG.

3 Function

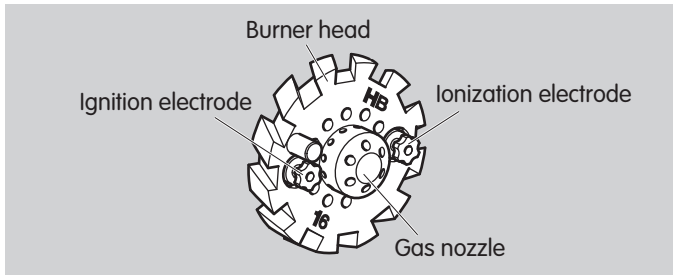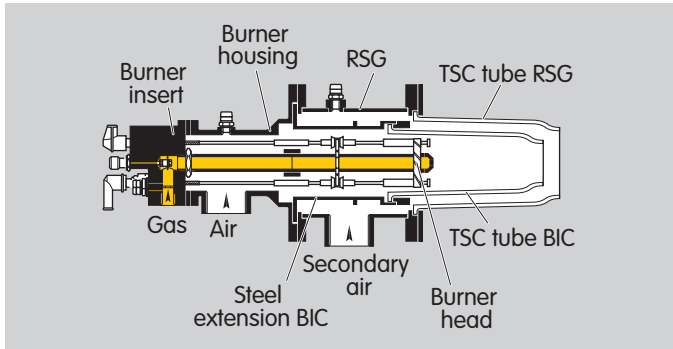

Gas flows through the gas connection in the burner housing and air flows through the burner insert as far as the nozzle-mixing burner head.

The combustible gas/air mixture is produced downstream of the burner head. Slots and holes in the air disc vary the degree and manner of twisting of the combustion air and determine the flame shape. Depending on the gas type, the geometry of the gas nozzle varies.

The gas/air mixture is electrically ignited directly by an ignition electrode or an ignition lance. A flame forms which is monitored using an ionisation electrode or optionally using a UV sensor.

Secondary air is additionally supplied to the process via the annular excess air burner housing RSG. The flame is not "influenced" in this process. The flame temperature decreases with increasing secondary air flow. Higher lambda values can be achieved than with only primary burner operation. High outlet velocities are possible with minimum energy supply.

The required flame velocity and burner output are achieved from the burner being combined with an appropriately shaped ceramic tube. The suitable shaping of the second ceramic tube TSC for RSG ensures a high outlet velocity of the secondary air.

4 Selection

4.1 Burner type

Type	Housing	Air temperature [°C]	Kiln temperature [°C]
BIC	GG 25	20–450	50–1450
BICA	AlSi	20–200	50–1450

4.2 Burner size

Burner size	Output [kW]
BIC 65, BICA 65	15, 50, 60
BIC 100	130, 200, 230
BIC 140	320, 360

4.3 Burner head

The choice of burner head depends on the flame shape, gas type and variant.

Flame shape	Code letter	Control range ²⁾		Low fire λ	λ ³⁾	Kiln temperature [°C]	Air temperature ⁴⁾ [°C]
		Continuous	Staged				
Short	R	1:10	> 1:10	> 1.05	0.8–1.3	50–1350	20–150 ⁵⁾
Long	H ¹⁾	1:10	1:10	> 1.3	0.8–1.5	500–1600	20–450

¹⁾ Only for BIC 65, BICA 65

²⁾ A wider control range can be achieved by choosing a variant.

³⁾ For exact values for the respective burner version, see burner diagram at www.docuthek.com.

⁴⁾ The gas flow rate should be reduced in accordance with the enthalpy gain of the preheated combustion air.

⁵⁾ Higher temperatures available on request.

Gas type	Code letter	Calorific value range [kWh/m ³ (n)]	Density [kg/m ³]
Natural gas L and H quality	B	8–12	0.7–0.9
Propane and propane/butane	G ¹⁾	25–35	2–2.7
Propane, propane/butane, butane	M	25–35	2–2.7

¹⁾ Only for BIC 100

Variant	Code letter	Output [kW]	λ
Ignition lance	L	approx. 1.5	> 1.05

4.4 Combination TSC for BIC and second TSC for RSG

Output [kW]	BIC	Outlet dia. TSC for BIC..R	RSG	Outlet dia. TSC for RSG	Secondary air flow [m ³ /h]	P _{secondary air} [mbar]
15	BIC(A) 65	TSC 50B020-300/135	RSG 100/65	TSC 100B050-250/35	250	25
50	BIC(A) 65	TSC 65B033-300/135	RSG 100/65	TSC 100B050-250/35	380	70
50	BIC(A) 65	TSC 65B033-300/135	RSG 100/65	TSC 100B065-250/35	600	60
60	BIC(A) 65	TSC 65B040-300/135	RSG 100/65	TSC 100B065-250/35	400	40
130	BIC 100	TSC 100B050-300/35	RSG 140/100	TSC 140B070-300/35	500	50
200	BIC 100	TSC 100B065-300/35	RSG 140/100	TSC 140B085-300/35	500	45
230	BIC 100	TSC 100B082-300/35	RSG 140/100	TSC 140A120-300/35	500	25
320	BIC 140	TSC 140B085-300/35	RSG 200/140	TSC 200B107-300/35	650	25
360	BIC 140	TSC 140A120-300/35	RSG 200/140	TSC 200A180-300/35	750	30


4.5 SiC material for TSC

Material	Air temperature [°C]	Burner head code letter	Optional lance (L)	Kiln temperature [°C]	Max. application temperature [°C]
Si-1500	< 450	H, R	L	< 1450 ¹⁾	1500 ²⁾

¹⁾ Higher kiln temperatures up to 1600°C available on request.

²⁾ Melting point of silicon 1380°C.

4.6 Calculating the length of BIC..R

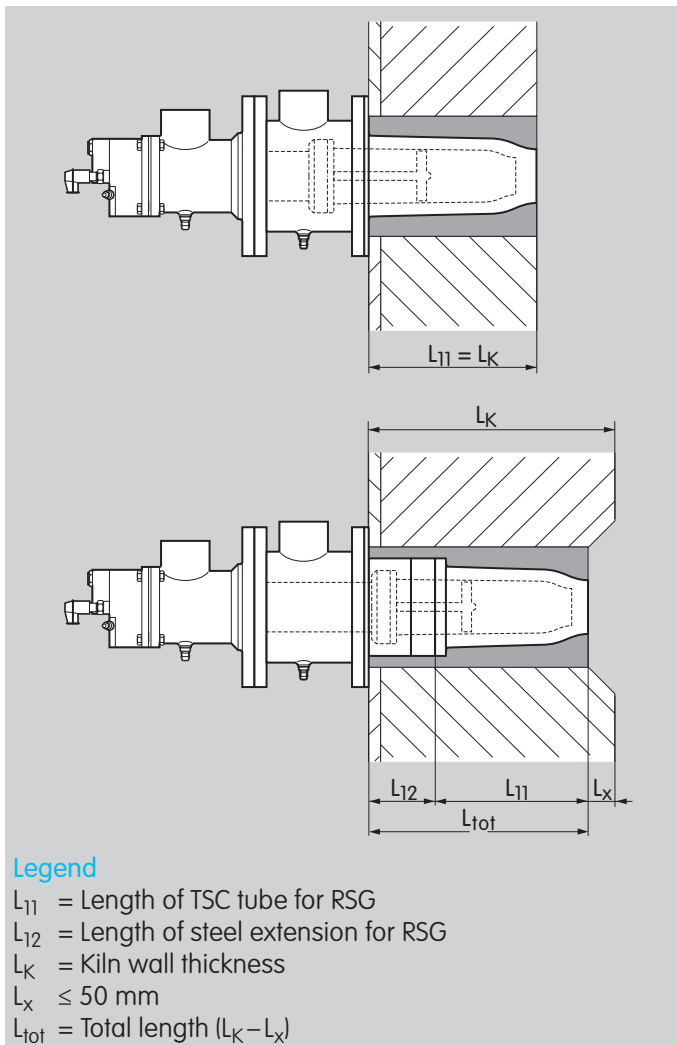

We recommend adapting the steel extension length (L_{12}) for RSG and the TSC tube length (L_{11}) so that the opening of the TSC tube is flush with the interior kiln wall ($L_x = 0$). The opening may not retreat more than 50 mm (L_x) from the surface of the interior kiln wall.

Calculating the steel extension for RSG

Length of TSC tube for RSG:

$$L_{11} = 250 \text{ or } 300 \text{ mm}$$

Length of steel extension for RSG:

$$L_{12} = L_K - (L_{11} + L_x)$$

Selecting the related burner length

There is a suitable burner length for every RSG length, depending on the burner size.

Annular excess air burner housing RSG	Steel extension required for RSG L_{12} [mm]	Length TSC for RSG L_{11} [mm]	Total length L_{tot} [mm]	Corresponding burner	Length of burner extension/position of burner head [mm]	Length TSC for BIC [mm]
100/65	0	250	250	BIC(A) 65	100/235	300/135
100/65	50	250	300	BIC(A) 65	150/285	300/135
100/65	100	250	350	BIC(A) 65	200/335	300/135
100/65	150	250	400	BIC(A) 65	250/385	300/135
140/100	0	300	300	BIC 100	150/185	300/35
140/100	50	300	350	BIC 100	200/235	300/35
140/100	100	300	400	BIC 100	250/285	300/35
200/140	0	300	300	BIC 140	250/285	300/35

Example for RSG 140/100 and BIC 100

$L_K = 400$ mm, $L_{11} = 300$ mm, $L_x = 0$ mm.

Required steel extension (L_{12}) for RSG:

$$L_{12} = L_K - L_{11} \Rightarrow 400 - 300 = 100 \text{ mm}$$

select: RSG 140/100-100 and BIC 100-250/285.

4.7 Type code

4.7.1 Annular excess air burner BIC..R

Code	Description
BIC	Burner for gas
BICA	Burner for gas with aluminium housing
65–140	Burner size
R	Flame shape: short
H	long
B	Gas type: natural gas
G	propane, propane/butane, butane
M	butane, propane, propane/butane
L	Versions: separate low-fire gas and air rate supply
R	reduced max. connection rating
-100	Length of burner extension
-150	
-200	
-250 ...	
/185-	Position of burner head
/235-	
/285-	
/335- ...	
(1–99)	Burner head identifier
A–Z	Construction stage
R	Annular excess air burner

4.7.2 Ceramic tube set TSC


Code	Description
TSC	Ceramic tube set
50–200	Designed for burner size
A	Shape: cylindrical tapered
B	
020, 033, 040, 050, 065, 070, 082, 085, 107, 120	Outlet dia. [mm]
–250, –300	Tube length [mm]
/35– /135–*	Position of burner head
Si-1500	Ceramic tube material

4.7.3 Annular excess air burner housing RSG

Code	Description
RSG 100	Annular excess air burner housing size
RSG 140	
RSG 200	
	Designed for burner size:
/65	BIC 65, BICA 65
/100	BIC 100
/140	BIC 140
-0	Annular excess air burner housing extension
-50	
-100	
-150	

5 Project planning information

5.1 Installation

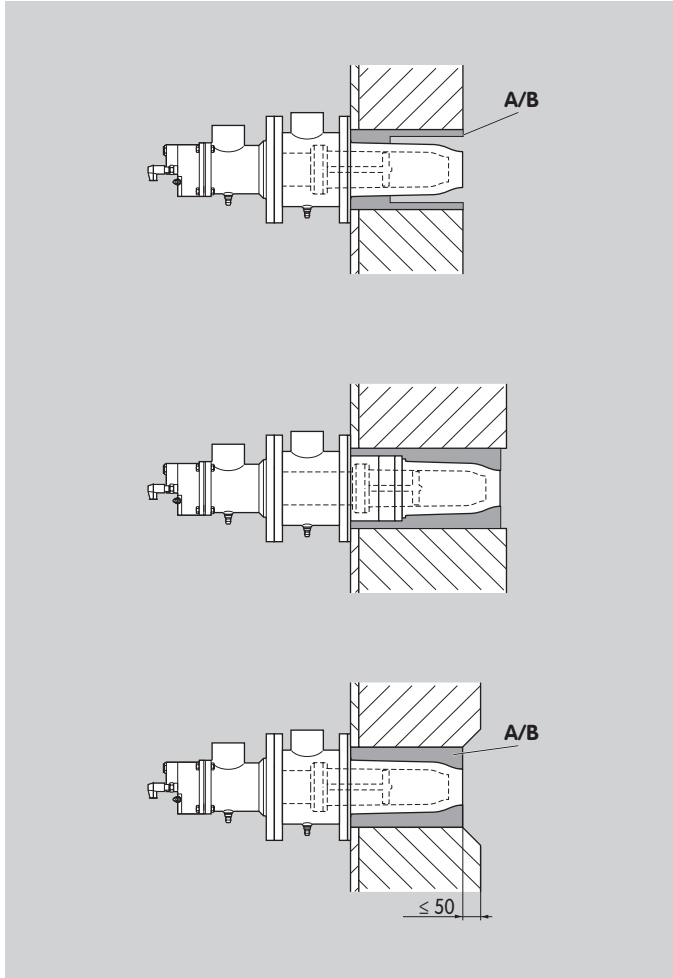

Installation position: any.

Gas and air connection in the burner housing BIC:
can be rotated in 90° steps.


Air connection in the annular excess air burner housing RSG:
can be rotated in 90° steps.

Install flexible tubes or bellows units to prevent mechanical stress or vibrations.

Insulate the TSC tube and the steel extension for RSG. Use solid shaped parts **A** or high temperature resistant ceramic fibrous material **B** for insulation.

The insulating material may come into contact with the RSG TSC tube in the flame formation area.

5.2 Recommended ignition transformer

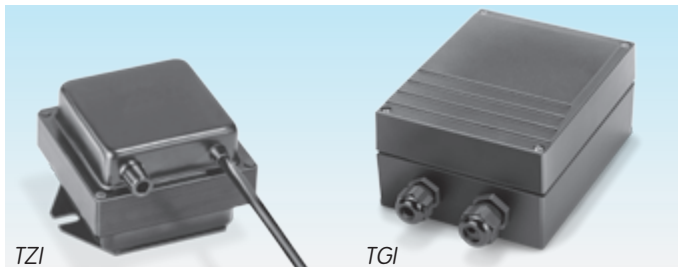

≥ 7.5 kV, ≥ 12 mA, e.g. TZI 7,5-12/100 or TGI 7,5-12/100.

5.3 Nozzle-mixing burners

Non-return gas valves are not required, since the burners are of the nozzle-mixing type.


5.4 Flame control

Flame control is performed using an ionisation electrode or optionally using a UV sensor.


5.5 Hot air compensation

In order to maintain the total connection rating constant in hot-air operating mode:


1. Gas connection rating and gas pressure are reduced

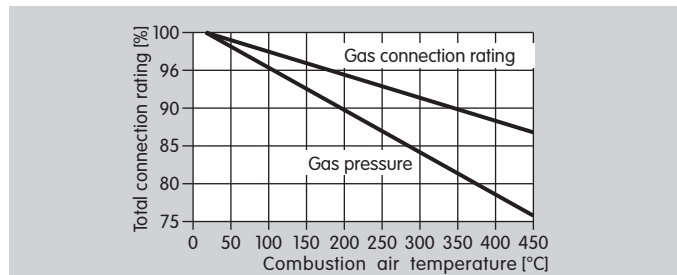

2. Air pressure is increased

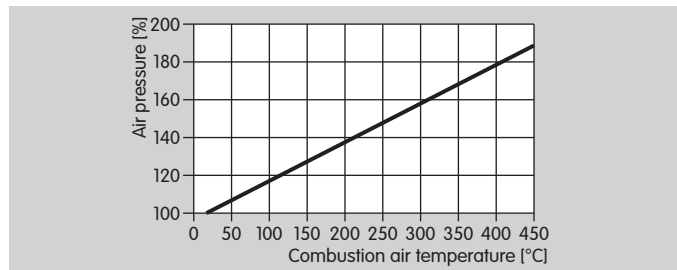

5.6 Purging air/cooling air

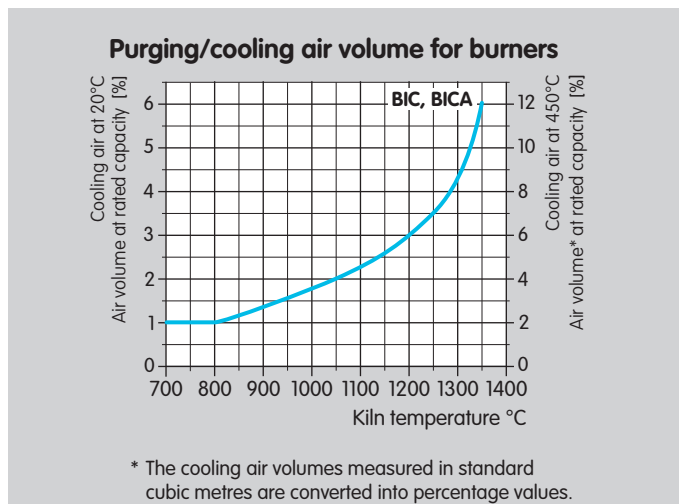


Purging air

While the burner is switched off and depending on the kiln temperature, the burner must be cooled with a low air volume in order to avoid condensation due to the kiln atmosphere entering the burner housing. The air fan should not be switched off until the kiln has cooled down completely.

Cooling air

Thermal overload of the burner components must be avoided while the burner is switched off. The cooling air volume depends on the kiln and cooling air temperatures.

5.7 Emissions

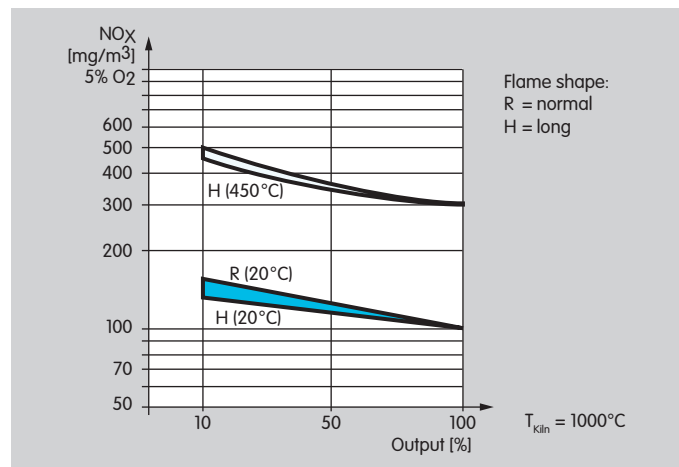


Emissions for cold-air operating mode do not exceed the limits stipulated by the German Clean Air Directive.

NO_x values depend on the temperature, burner head, combustion chamber, kiln chamber, λ value and output (NO_x values on request).

If operated with LPG, NO_x values are approx. 25% higher.

5.8 Flame temperature

Theoretical interrelationship of flame temperature and lambda λ .

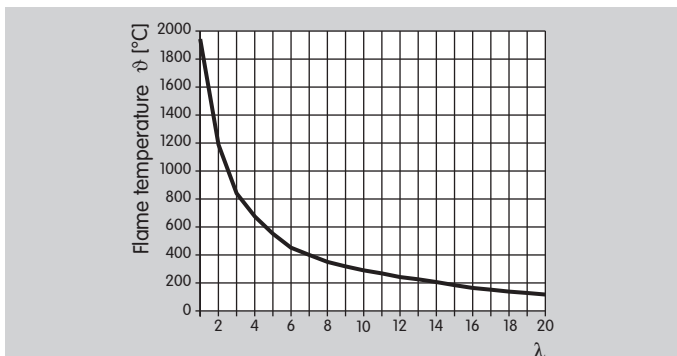

5.9 Gas line connection

To ensure accurate measurements of the pressure differential on the integrated gas measuring orifice for burners BIC as from construction stage E, the following applies for the design of the gas connection:

- Ensure undisturbed flow to the gas connection on the burner inlet for a distance of ≥ 5 DN.
- Use a bellows unit with the same nominal dimensions as the gas connection on the burner.
- Use a pipe bend up to an angle of 90° with the same nominal dimensions as the gas connection on the burner.
- Only use reducing nipples with an external thread at both ends in order to reduce the nominal diameter on the burner (e.g. from 1" to $\frac{3}{4}$ ").

To ensure optimum flow, to avoid incorrect measurements and to enable burner operation with excess gas, we recommend the following:

- Do not screw the manual valve directly into the burner.

5.10 Air line connection

Ensure there is a bellows unit and an air adjusting cock upstream of the burner. It is recommended to install a measuring orifice FLS to determine the air flow rate.

6 Technical data

Output [kW]	Burner	Outlet dia. TSC for BIC..R	Flame shape/code letter	Construction stage	Visible flame length ¹⁾	Flame outlet velocity [m/s] ²⁾
15	BIC(A) 65	20	H...R	E (D)	15	100
50	BIC(A) 65	33	H	E (D)	27	120
60	BIC(A) 65	40	H	E (D)	33	100
130	BIC 100	50	R	F	40	145
200	BIC 100	65	R	F	45	130
230	BIC 100	82	R	F	50	100
320	BIC 140	85	R	E	60	125
360	BIC 140	120	R	E	80	70

¹⁾ Measured from ceramic tube opening at rated capacity in the open air, $\lambda = 1.05$.

²⁾ Referred to rated capacity, calculated using the flame temperature:
1600°C = type "R" flame shape, 1500°C = type "H" flame shape, $\lambda = 1.05$.

Gas supply pressure: approx. 10 to 40 mbar,
air supply pressure: approx. 10 to 30 mbar,
secondary air pressure: 25 to 70 mbar,
each depending on flame shape and gas type (gas and air pressures and secondary air – see Operating characteristic diagram (D, GB) and Flow rate curve (D, GB) – www.docu-uthek.com → Elster Kromschroder → Products → 07 Burners and pilot burners → Annular excess air burners → Kind of document: Operating characteristic diagram/Flow rate curve.

Annular excess air burner housing RSG length:
0 to 150 mm (other lengths available on request).

Types of gas: natural gas, LPG (gaseous).

Control ranges: approx. 1:10 for modulating or stage control.

Excess air up to $\lambda = 50$ is possible, depending on the burner size and ceramic tube combination.

Flame control:
direct ionisation control (UV control as an option).

Ignition: direct, electrical, lance as an option.

Ignition capacity $\leq 40\%$ of max. burner capacity.

For higher ignition capacity – see Operating characteristic diagram (D, GB) – www.docuuthek.com → Elster Kromschroder → Products →

07 Burners and pilot burners → Annular excess air burners →

Kind of document: Operating characteristic diagram.

Max. kiln temperature: 1450°C with TSC tube SI-1500.

Burner housing:

BIC: GG25,

BICA: AlSi.

Hot air:

BIC up to 450°C,

BICA up to 250°C.

Flame outlet velocity: medium to high.


Flame shape: normal, long.

The flame diameter is one to two times that of the burner tube outlet.

Integrated measuring orifice and adjuster for the gas flow rate in the gas connection flange (only BIC).

6.1 Dimensions


6.1.1 BIC..R with annular excess air burner housing RSG

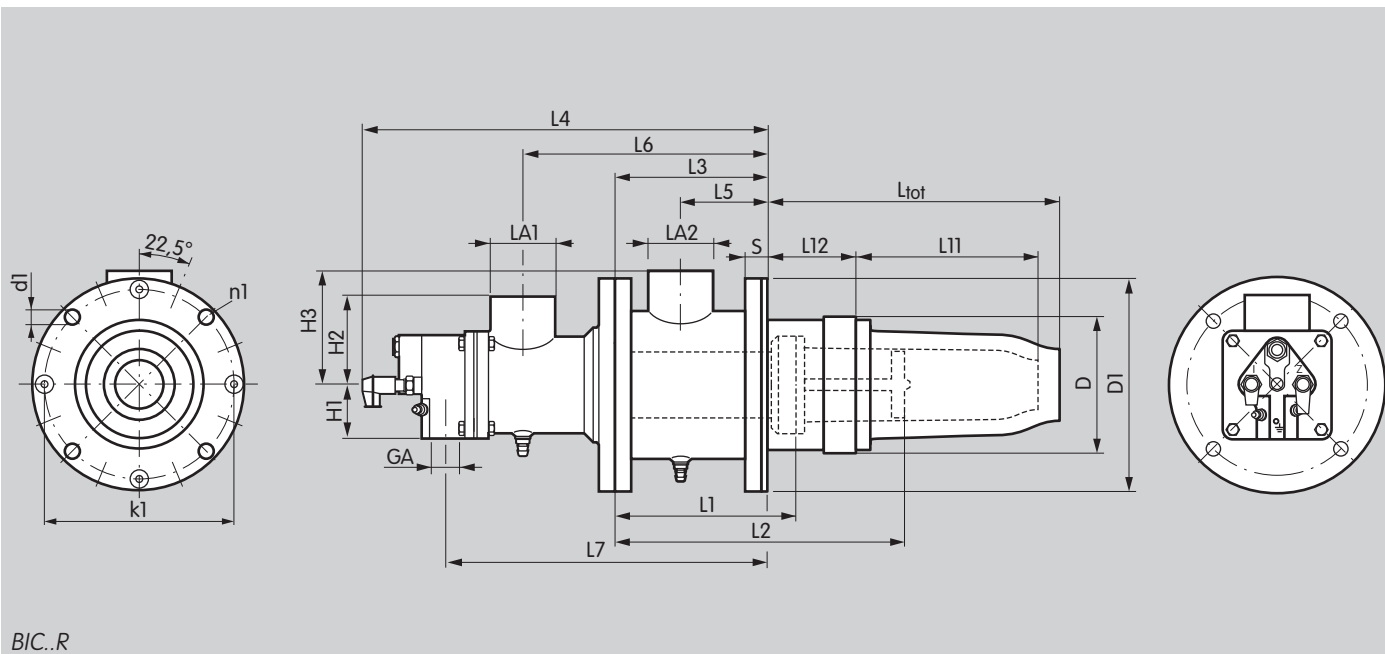

BIC..R

Type	Gas GA	Connections		Dimensions [mm]														Weight [kg]
		Air LA1	Air LA2	H1	H2	H3	L3	L4	L5	L6	L7	S	D	D1	k1	d1	n1	
BIC 65	Rp 3/4	Rp 1 1/2	Rp 2	47.5	62	105	169	414	101	244	327	22	125	195	165	13	4	13.4
BIC 100	Rp 1	Rp 2	Rp 2 1/2	60	100	128	188	473	111	293	375	25	168.3	240	200	14	4	21.4
BIC 140	Rp 1 1/2	DN 80 DIN 2501 PN 16	DN 100 DIN 2501 PN 16	80	150	210	280	661	150	412	553	22	252	330	295	22	8	50.6


6.1.2 BIC..L..R with annular excess air burner housing RSG and steel extension for RSG

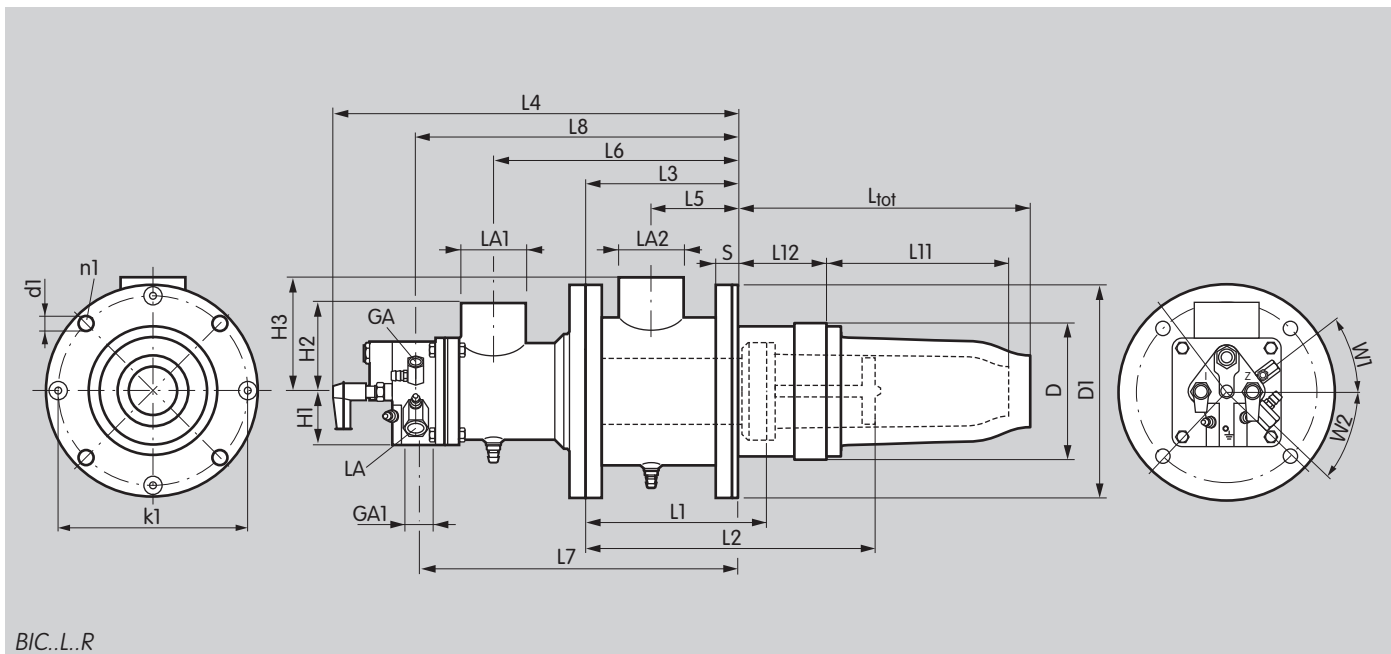

BIC..L..R

Type	Connections					Dimensions [mm]																Weight [kg]	
	Gas GA	Air LA	Gas GA1	Air LA1	Air LA2	H1	H2	H3	L3	L4	L5	L6	L7	L8	S	D	D1	k1	d1	n1	W1		
BIC 100...L	Rp 3/8	Rp 1/4	Rp 1	Rp 2	Rp 2 1/2	60	100	128	188	475	111	293	375	380	25	168.3	240	200	14	4 x	36°	45°	22.3
BIC 140...L	Rp 3/8	Rp 1/4	Rp 1 1/2	DN 80 DIN 2501 PN 16	DN 100 DIN 2501 PN 16	80	150	210	280	661	150	412	553	558	22	252	330	295	22	8	42°	45°	51.5

6.1.3 BICA with annular excess air burner housing RSG and steel extension for RSG

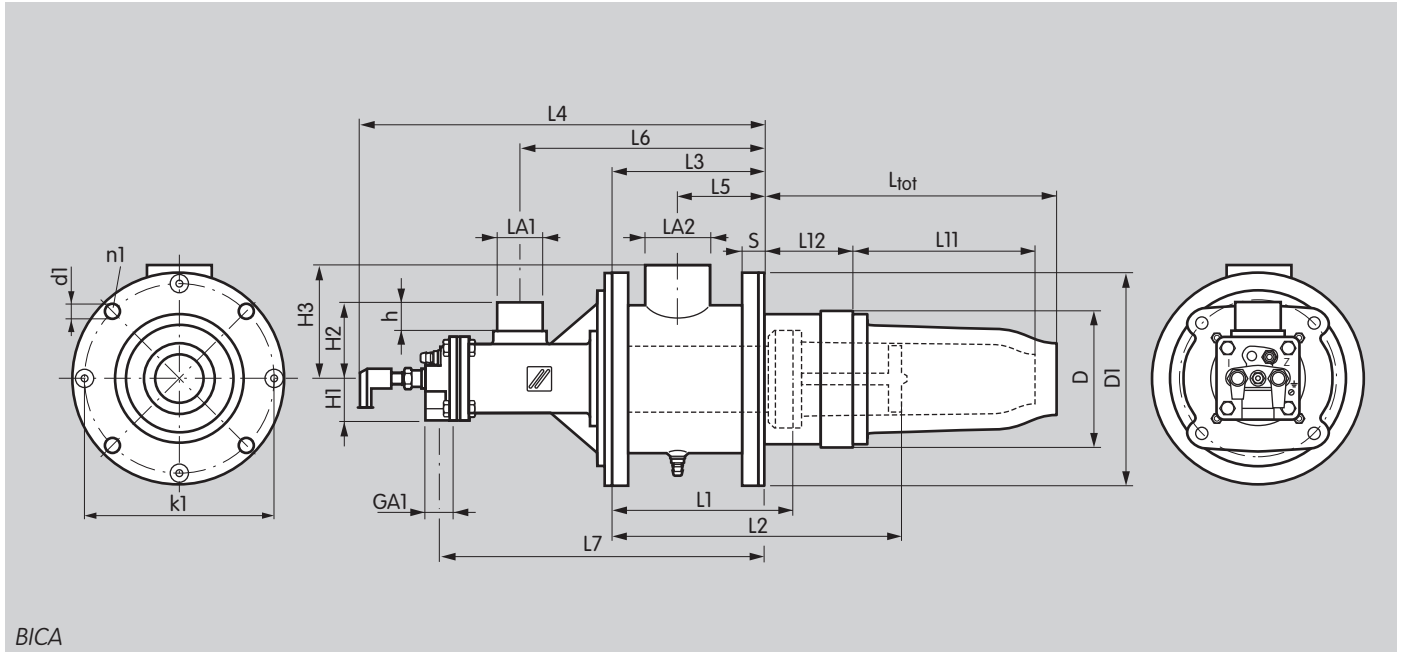

BICA

Type	Connections			Dimensions [mm]														Weight [kg]
	Gas GA	Air LA1	Air LA2	H1	H2	H3	L3	L4	L5	L6	L7	S	D	D1	k1	d1	n1	
BICA 65	Rp 1/2	ø 48	Rp 2	44	80	105	169	424	101	266	341	25	125	195	165	13	4 x	10.2

7 Maintenance cycles

Twice per year, but if the media are highly contaminated, this interval should be reduced.

Feedback

Finally, we are offering you the opportunity to assess this "Technical Information (TI)" and to give us your opinion, so that we can improve our documents further and suit them to your needs.

Clarity

Found information quickly
Searched for a long time
Didn't find information
What is missing?
No answer

Comprehension

Coherent
Too complicated
No answer

Scope

Too little
Sufficient
Too wide
No answer

Use

To get to know the product
To choose a product
Planning
To look for information

Navigation

I can find my way around
I got "lost"
No answer

My scope of functions

Technical department
Sales
No answer

Remarks

(Adobe Reader 7 or higher required)
www.adobe.com

Contact

Elster GmbH
Postfach 2809 · 49018 Osnabrück
Sirothweg 1 · 49504 Lotte (Büren)
Germany
T +49 541 1214-0
F +49 541 1214-370
info@kromschroeder.com
www.kromschroeder.com
www.elster.com

The current addresses of our international agents are available on the Internet:
www.kromschroeder.de/index.php?id=718&L=1

We reserve the right to make technical modifications in the interests of progress.
Copyright © 2007 – 2011 Elster Group
All rights reserved.